


# SUPERWINCH

**Model H10P 10000 lb (4500 kg) Industrial hydraulic planetary winch.  
Engineered, built & tested to SAE J706 standard**

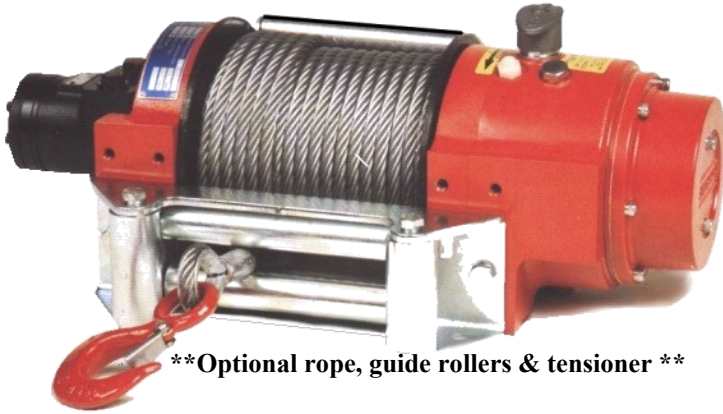

**\*\*Optional rope, guide rollers & tensioner \*\***

## Main Features

1. Engineered, built & tested to SAE J706
2. Industrial 2 stage steel planetary geared
3. Automatic applied brake.
4. High torque motor
5. Heavy duty fabricated steel drum
6. Manual or pneumatic free-spool option

<b>Gear Ratio</b>	16:1
<b>Gear Box</b>	2 stage steel planetary oil filled
<b>Brake</b>	Automatic oil bathed drag brake
<b>Drum</b>	89 mm diameter steel fabricated
<b>Flow</b>	57 Litres per Min (15 US gal)
<b>Pressure</b>	116 Bar (1700 psi) maximum
<b>Free-spool</b>	Options of Pneumatic or Manual
<b>Rope</b>	7/16" (11mm) steel (30m Maximum)

<u>Line Pull</u>		<u>1st Layer</u>	<u>2nd Layer</u>	<u>3rd layer</u>	<u>4th layer</u>
<b>PSI</b>	<b>BAR</b>	<b>Kgs</b>	<b>Kgs</b>	<b>Kgs</b>	<b>Kgs</b>
<b>1700</b>	<b>116</b>	4540	3720	3160	2740
<u>Line Speed (estimates)</u>		<u>Metre</u>	<u>Metre</u>	<u>Metre</u>	<u>Metre</u>
<b>10 Gal/min</b>	<b>40 l/min</b>	6.4 M	8.0 M	9.5 M	11 M
<b>15 Gal/min</b>	<b>57.0 l/min</b>	9.2 M	11.5 M	13.5 M	16 M
<u>Drum Capacity Standard drum 10" (229mm)</u>					
<b>11mm (7/16") rope</b>		5.0 M	12.5 M	21.5 M	30 M

## H10P Winch Installation

